



OWNER'S MANUAL ADDENDUM


XDC-1 Multimedia Loudspeaker System

(formerly known as the Xducer 2.1)

We include with the XDC-1, (2) sets of dual-tiered feet for tilting of the XD1 Satellite Speaker, in certain applications.

To install these feet, all you need is a medium head Phillips screwdriver.

Just follow these easy instructions:

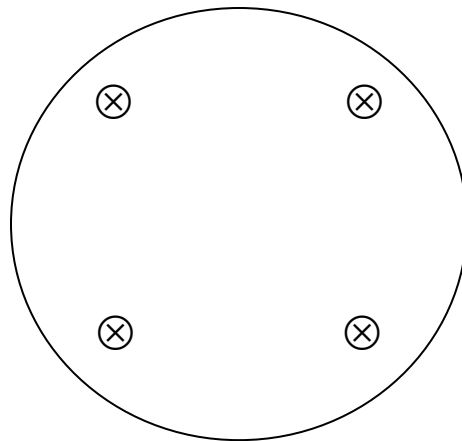

On the bottom of the XD1, you will find (4) thin rubber feet that isolate the XD1 from the surface on which it rests.

1. Remove those feet with your fingernails, and store them for possible later use.
2. Underneath each you will find a Phillips screw that secures the bottom plate to the speaker. Unscrew all (4) screws. If this causes the bottom plate to come out, just re-install it into the base, making sure all (4) screw holes line up.
3. Screw the higher feet into their respective holes – use the enclosed tall screws for the tall feet. **DO NOT OVERTIGHTEN.** Most applications require the two medium height feet at the rear, and the two tall feet in the front, which tilts the speaker backward. This allows for a more proper sound distribution in applications where the listener is often above the speaker's driver, such as desktops.

However, there may be an application requiring forward tilting. In that case, just install the feet in the opposite manner, with the tall ones in the rear and the medium ones in the front. We do not recommend sideways tilting.

In order to protect the surface of the XD1, we **require** that each XD1 have either the (4) standard feet, or the (4) taller feet on it at all times. Any damage that may occur as a result of not having (4) feet installed at all times may render the warranty null and void.

Please contact us if you have any questions about feet installation and applications.

XHIFI, INC.

465 PIKE ROAD • UNIT 112 • HUNTINGDON VALLEY • PENNSYLVANIA • 19006-1621 • USA

866-55-XHIFI • 267-288-0199 • 267-288-0198 FAX

info@xhifi.com • www.xhifi.com